




SF2300

SNUGGER PARKING HEATER

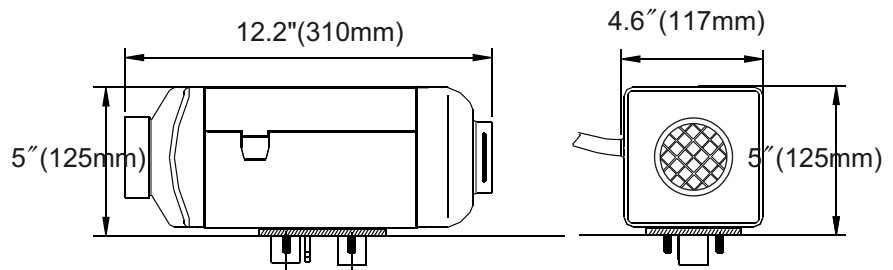

Features and benefits

- Quiet operation with easy installation
- Compact design
- Fast Return On Investment
- Industry certified

AIR-HEATER PERFORMANCE DATA

Model	AIRSNUGGER® SF2300			
	Super	High	Medium	Lower
Heating value (±10%) btu / hr (Kw)	7850 (2.3)	6485 (1.9)	4437 (1.3)	3072 (0.9)
Fuel consumption US gal / hr (L / h)	0.07 (0.28)	0.06 (0.24)	0.04 (0.15)	0.02 (0.1)
Fuel	Diesel			
Air flow (±10%) Cfm	49	41	20	28
Electric power consumption (watt) / amp running (12 and 24 Volt)	34 (2.8 / 1.4)	23 (1.9 / 0.95)	13 (1.1 / 0.54)	9 (0.75 / 0.375)
Start-up (watt) / amp (12 and 24 Volt)	100 (8.3 / 4.2)			
Rated voltage (V)	12		24	
Low-voltage protection will shutdown the units when it reach to approx. 10.2 volt and 21 volt.	Approx. 10.5 volt and 21 volt Under-voltage protection: 20 secs			
Over-voltage protection will shutdown the units when it reach to approx. 16 volt and 32 volt.	Approx. 16 volt and 32 volt Over-voltage protection: 20 secs			
Overheat protection (±10%) °C / °F	115°C / 239°F			
Weight kg (lbs)	Approx. 2.7 kg / 5.9 lbs			



SNUGGER HEATER SYSTEMS-CANADA
 Unit B-1465 Kebet Way Port Coquitlam, BC V3C 6L3
 Tel:877-386-7320 Fax:877-366-5013
www.snuggerheaters.com



GB/T19001-2008/ISO9001:2008

欧盟认证

E-MARK 认证